
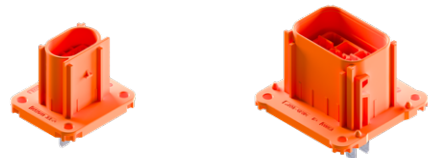


HV CLASS 2

6.3

Robust. Simple. Approved.

- ⊕ Water proof sealed connector system
- ⊕ HVIL optional
- ⊕ Touch protection
- ⊕ Multiple coding
- ⊕ Robust design

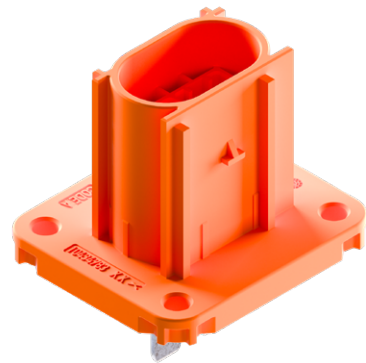

APPLICATIONS

- On-Board Charger (OBC)
- And other devices

FEATURES



Current Carrying Capacity
50 A continuous
@ 80 °C / 6 mm²



Sealing Protection
IPX7, IP6K9K



Voltage Range
630 V



Designed acc.
DIN TS 72036



Temperature
-40 °C to 105 °C



Touch Protection
IPxxB



Cable Cross-Section
4 mm² and 6 mm²




Validation acc. to
LV-215

Experience how we connect
the global automotive industry
with high performance
connector systems.

www.kostal-kontakt-systeme.com


DIMENSIONS

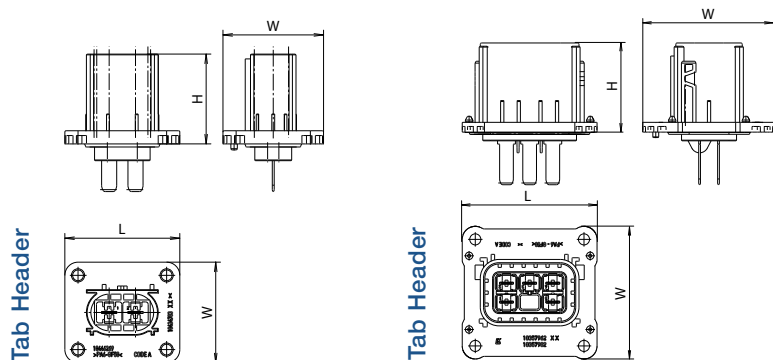

TECHNICAL DATA

Tab Header


Cavities	PN Code A	Dimensions L x H x W (mm)
2	10446269	48 x 37.5 x 42
5	10357982	62 x 41 x 61

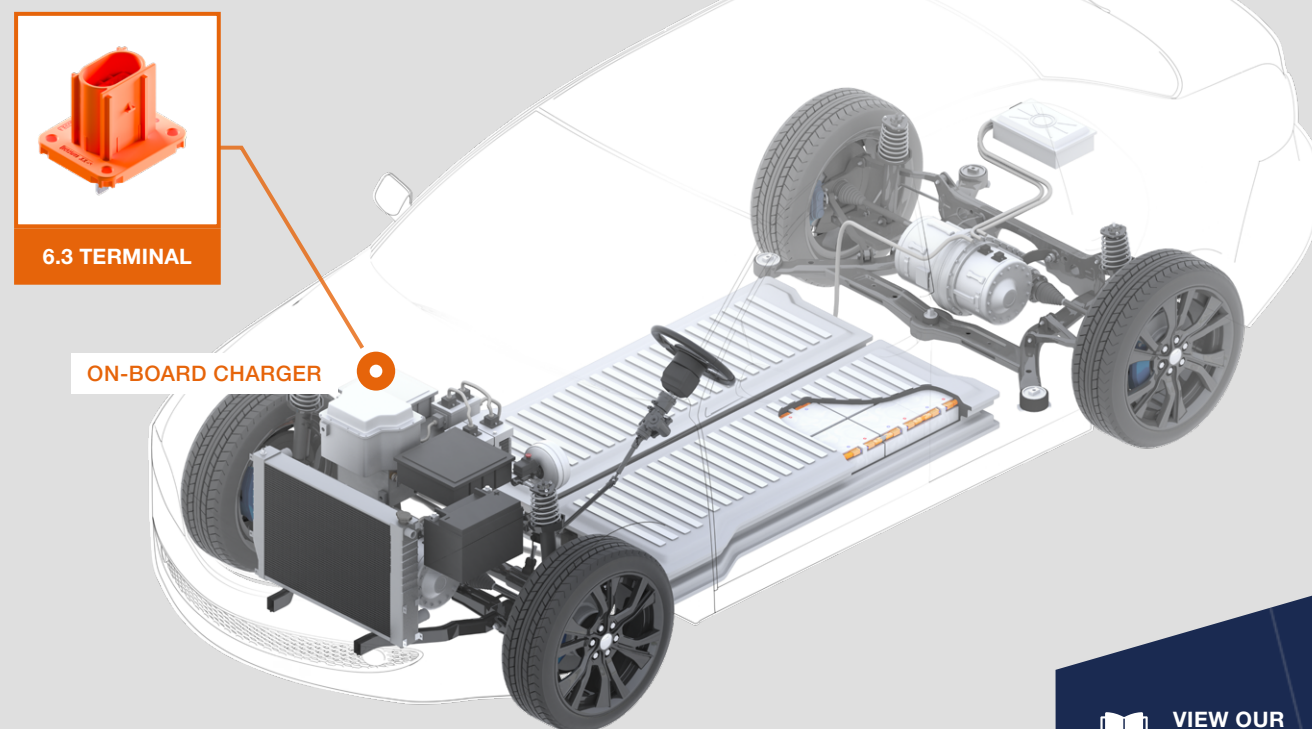

COMPATIBLE WITH

Compatible with
standard industry
6.3 terminal

 VIEW OUR
PRODUCT CATALOGUE



 CONTACT US:
kks_portfolio@kostal.com