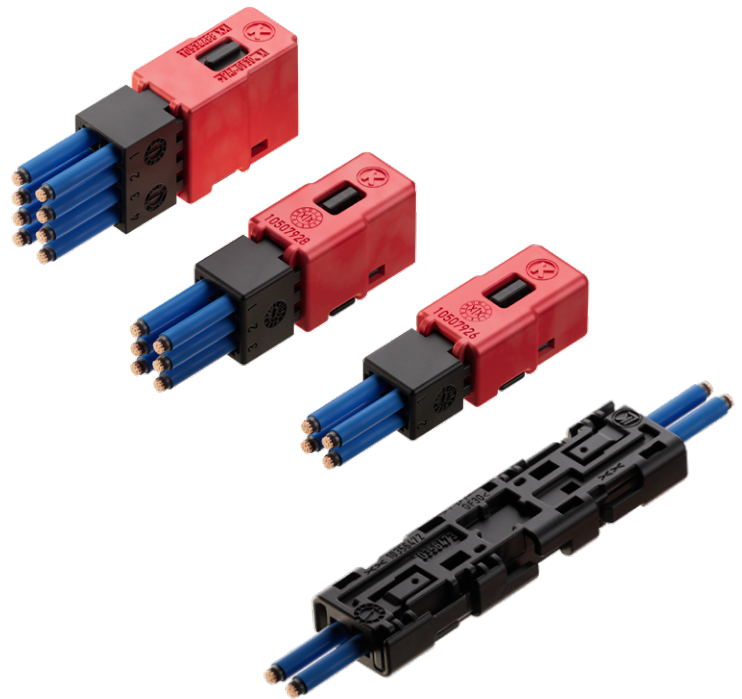


## LOW VOLTAGE CONNECTOR

**MQ 0,6 Splice Connector**

Enabler for automation.

- + Approved for automated blockloading production
- + Available as end-splice option 4-way, 6-way and 8-way
- + Also available as parallel splice with 2+2-way option
- + Complete system approach-connector and terminal
- + Replaces manual ultrasonic splice operation, no need of manual taping operation
- + Each splice is 100 % process monitoring capable

**APPLICATIONS**

- Replacement of traditional splice welding process
- Enables requirements for functional safety (ISO 26262) application

**FEATURES**

**Current Carrying Capacity**  
8 A continuous  
80 °C / 0.75 mm



**Pitch**  
2.54 mm



**Cable Cross-Section**  
0.13 mm<sup>2</sup> - 0.75 mm<sup>2</sup>



**Designed acc.**  
DIN TS 72036



**Temperature**  
-40 °C ~ 105 °C





**Validated acc.**  
LV 214  
Meets req. of  
DIN TS 70214

Experience how we connect  
the global automotive industry  
with high performance  
connector systems.

[www.kostal-kontakt-systeme.com](http://www.kostal-kontakt-systeme.com)



## DIMENSIONS

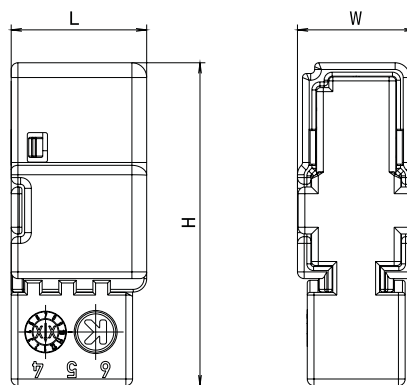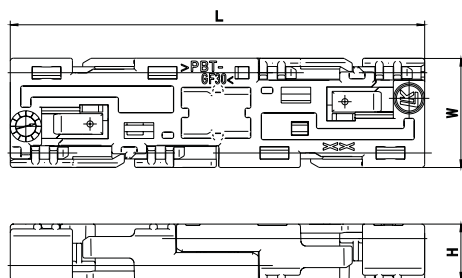

## TECHNICAL DATA

Code / index	No. cavities	Splice Connector	TPA	Dimensions L x H x W (mm)
Code A	4 or 2+2	10356473	na	11 x 40 x 5
Code A	4	10508265	10507926	7.55 x 24.05 x 8.75
Code A	6	10508266	10507928	10.09 x 24.05 x 8.75
Code A	8	10532857	10534488	12.03 x 24.05 x 8.75



## COMPATIBLE WITH



Terminal MQ 0,6



VIEW OUR  
PRODUCT CATALOGUE



CONTACT US:  
[kks\\_portfolio@kostal.com](mailto:kks_portfolio@kostal.com)